

Version : 3.0

TECHNICAL SPECIFICATION
MODEL NO. : PM070WXF

The content of this information is subject to be changed without notice.

Please contact PVI or its agent for further information.

Customer's Confirmation

Customer _____

Date _____

By _____

PVI's Confirmation

FOR MORE INFORMATION:
AZ DISPLAYS, INC.
75 COLUMBIA, ALISO VIEJO, CA 92656
[Http://www.AZDISPLAYS.com](http://www.AZDISPLAYS.com)

Confirmed By 中山峰峰

Prepared By 李穎儀

Revision History

| Rev. | Issued Date | Revised Contents |
|-------------|--------------------|--|
| 1.0 | May . 26 , 2008 | New |
| 2.0 | July . 17 ,2008 | Page 4 3.Mechanical Specifications Active Area from 91.4(H)X152.4(V) to 91.44(H)X152.4(V) Pixel Pitch from 0.190(H)x0.190(V) to 0.1905(H)x0.1905(V) Page 5 4.Mechanical Drawing of TFT-LCD Module Modify outline Page 11 5-3) Sensor driving Modify Connector type from JST PHR-2 to JST BHSR-02VS-1 |
| 3.0 | Aug.13 , 2009 | Modify Page 28 16.Packing Diagram |

TECHNICAL SPECIFICATION**CONTENTS**

| NO. | ITEM | PAGE |
|------------|--|-------------|
| - | Cover | 1 |
| - | Reversion History | 2 |
| - | Contents | 3 |
| 1 | Application | 4 |
| 2 | Features | 4 |
| 3 | Mechanical Specifications | 4 |
| 4 | Mechanical Drawing of TFT-LCD module | 5 |
| 5 | Input / Output Terminals | 7 |
| 6 | Absolute Maximum Ratings | 11 |
| 7 | Electrical Characteristics | 12 |
| 8 | Pixel Arrangement | 13 |
| 9 | Display Color and Gray Scale Reference | 14 |
| 10 | Block Diagram | 15 |
| 11 | Interface Timing | 16 |
| 12 | Power On Sequence | 21 |
| 13 | Optical Characteristics | 22 |
| 14 | Handling Cautions | 26 |
| 15 | Reliability Test | 27 |
| 16 | Packing Diagram | 28 |

1.Application

This data sheet applies to a color TFT LCD module, PM070WXF.
The application of panel are OA product, portable DVD, car TV(must use Analog to Digital driving board), which requires high quality flat panel display.
Prime View advises your systems use PVI's timing controller IC (PVI-2003A) which will generate proper timing signals to control it.


2. Features

- . Wide VGA (800*480 pixels) resolution by Portrait mode
- . Amorphous silicon TFT LCD panel with High Brightness LED back-light unit
- . Pixel in stripe configuration
- . Thin and light weight
- . Display Colors : 262,144 colors
- . TTL transmission interface
- . Wide viewing angle

3.Mechanical Specifications

| Parameter | Specifications | Unit |
|--------------------------------|------------------------------|-------------|
| Screen Size | 7.0(diagonal) | inch |
| Display Format | 480×(R, G, B)×800 | dot |
| Display Colors | 262,144 | - |
| Active Area | 91.44(H)X152.4(V) | mm |
| Pixel Pitch | 0.1905(H)×0.1905(V) | mm |
| Pixel Configuration | Stripe | - |
| Outline Dimension | 104.0(W)X165.0(H)×6.2 (D) | mm |
| Weight | 158±10 | g |
| LED Back-light | 18-middle power LED | - |
| Surface treatment | Anti-glare and EWV, Haze=25% | - |
| Display mode | Normally white | - |
| Gray scale inversion direction | 3 o'clock [Note 13-1] | - |

Outline Drawing : Rear View (unit mm)

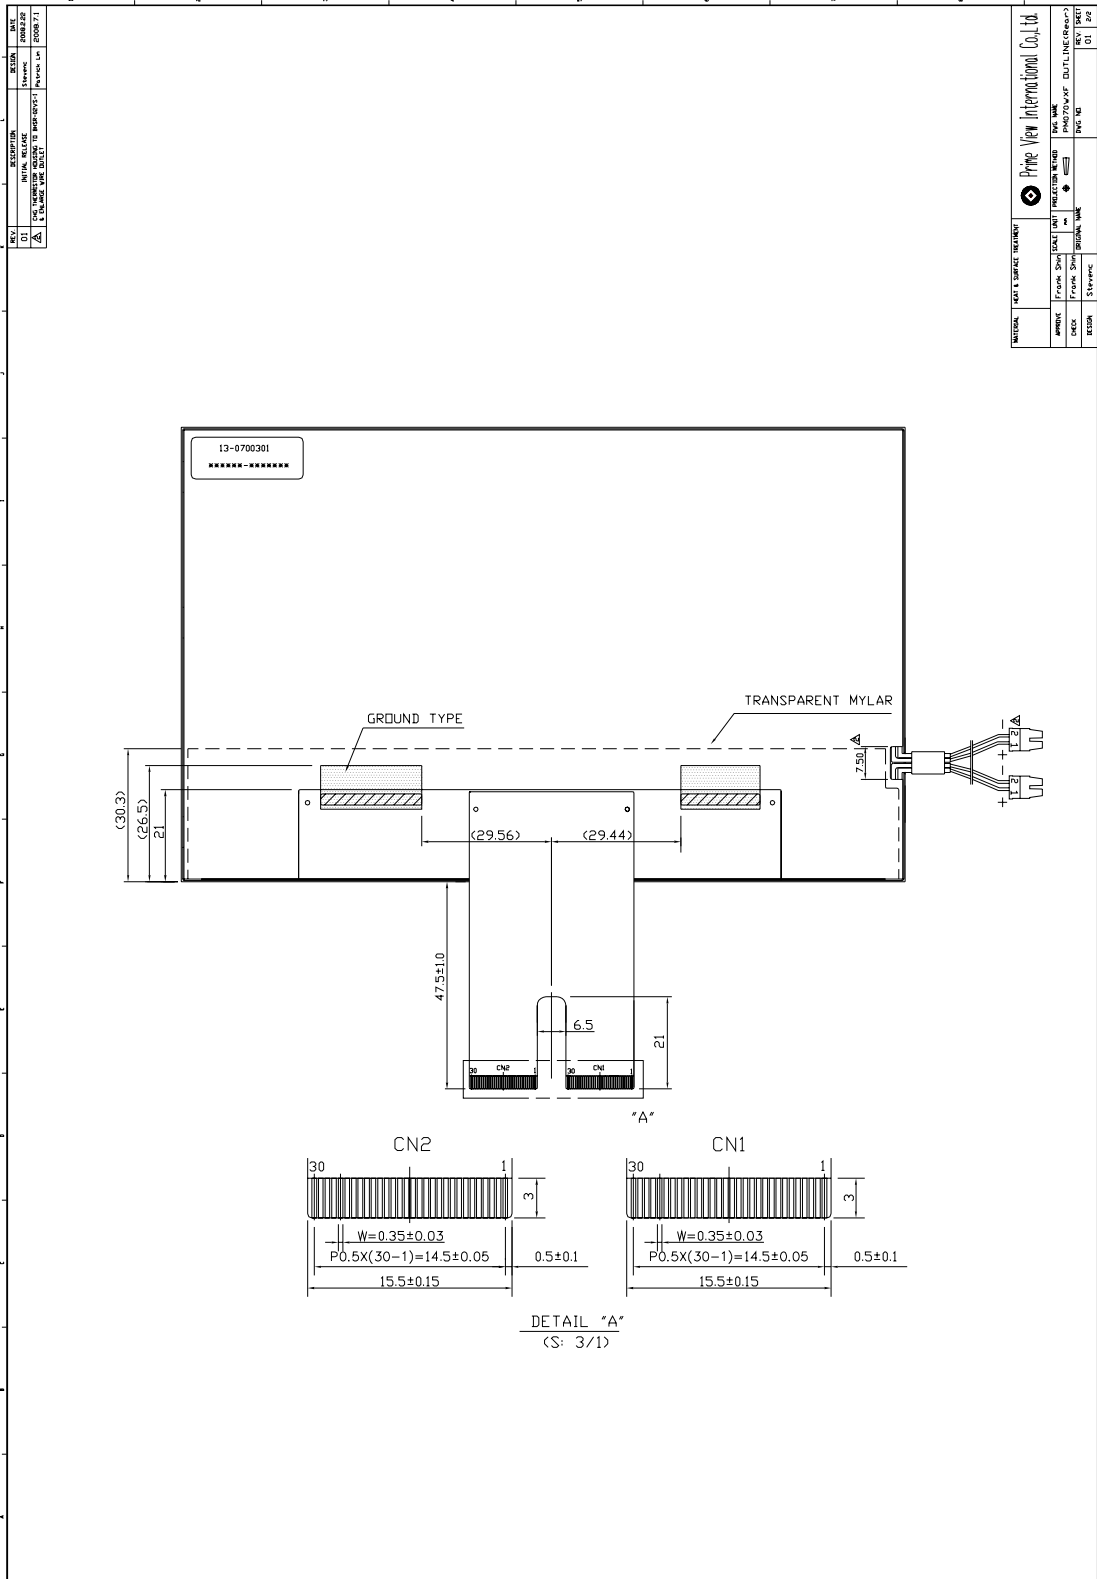

5.Input / Output Terminals

5-1) TFT-LCD Panel Driving

CN 1

LCD Module Connector
 FPC Down Connect , 30 Pins , Pitch : 0.5 mm

| Pin No. | Symbol | I/O | Function | Remark |
|---------|--------|-----|---|----------|
| 1 | DIO1 | I/O | Horizontal Start Pulse Signal Input or Output | Note 5-1 |
| 2 | VSS1 | I | Ground | |
| 3 | VDD1 | I | Power Supply | |
| 4 | CLK | I | Horizontal Shift Clock | |
| 5 | VSS1 | I | Ground | |
| 6 | R/L | I | Right / Left selection | Note 5-1 |
| 7 | R0 | I | Red Data (LSB) | |
| 8 | R1 | I | Red Data | |
| 9 | R2 | I | Red Data | |
| 10 | R3 | I | Red Data | |
| 11 | R4 | I | Red Data | |
| 12 | R5 | I | Red Data (MSB) | |
| 13 | VSS1 | I | Ground | |
| 14 | G0 | I | Green Data (LSB) | |
| 15 | G1 | I | Green Data | |
| 16 | G2 | I | Green Data | |
| 17 | G3 | I | Green Data | |
| 18 | G4 | I | Green Data | |
| 19 | G5 | I | Green Data (MSB) | |
| 20 | VSS1 | I | Ground | |
| 21 | B0 | I | Blue Data (LSB) | |
| 22 | B1 | I | Blue Data | |
| 23 | B2 | I | Blue Data | |
| 24 | B3 | I | Blue Data | |
| 25 | B4 | I | Blue Data | |
| 26 | B5 | I | Blue Data (MSB) | |
| 27 | LD | I | Load output signal | Note 5-2 |
| 28 | REV | I | Data invert control | Note 5-3 |
| 29 | POL | I | Polarity selection | Note 5-4 |
| 30 | DIO2 | I/O | Horizontal Start Pulse Signal Input or Output | Note 5-1 |

CN 2

| Pin No. | Symbol | I/O | Function | Remark |
|---------|--------|-----|---|-----------|
| 1 | VSS2 | I | Ground | |
| 2 | V1 | I | Gamma Voltage 1 | Note 5-10 |
| 3 | V2 | I | Gamma Voltage 2 | Note 5-10 |
| 4 | V3 | I | Gamma Voltage 3 | Note 5-10 |
| 5 | V4 | I | Gamma Voltage 4 | Note 5-10 |
| 6 | V5 | I | Gamma Voltage 5 | Note 5-10 |
| 7 | V6 | I | Gamma Voltage 6 | Note 5-10 |
| 8 | V7 | I | Gamma Voltage 7 | Note 5-10 |
| 9 | VSS2 | I | Ground | |
| 10 | V8 | I | Gamma Voltage 8 | Note 5-10 |
| 11 | V9 | I | Gamma Voltage 9 | Note 5-10 |
| 12 | V10 | I | Gamma Voltage 10 | Note 5-10 |
| 13 | V11 | I | Gamma Voltage 11 | Note 5-10 |
| 14 | V12 | I | Gamma Voltage 12 | Note 5-10 |
| 15 | V13 | I | Gamma Voltage 13 | Note 5-10 |
| 16 | V14 | I | Gamma Voltage 14 | Note 5-10 |
| 17 | VSS2 | I | Ground | |
| 18 | VDD2 | I | Voltage for analog circuit | Note 5-10 |
| 19 | VCOM | I | Common Voltage | |
| 20 | XON | I | NC | Note 5-11 |
| 21 | OE | I | Output Enable | Note 5-5 |
| 22 | U/D | I | Up / Down Selection | Note 5-6 |
| 23 | CKV | I | Vertical Shift Clock | Note 5-7 |
| 24 | STVU | I/O | Vertical Shift Pulse Signal Input or Output | Note 5-6 |
| 25 | STVD | I/O | Vertical Shift Pulse Signal Input or Output | Note 5-6 |
| 26 | VGG | I | Gate On Voltage | Note 5-8 |
| 27 | GND | I | Ground | |
| 28 | VCC | I | Voltage for logic circuit | |
| 29 | GND | I | Ground | |
| 30 | VEE | I | Gate Off Voltage | Note 5-9 |

Note 5-1: Select left or right shift

| R/L | DIO1 | DIO2 | Shift |
|-----|-------|-------|---------------|
| 1 | Input | Hi-Z | Left to right |
| 0 | Hi-Z | Input | Right to left |

Note 5-2: Latch the polarity of outputs and switch the new data to outputs

At the rising edge (LD), latch the "POL" signal to control the polarity of the outputs.

Note 5-3: Control whether the Data R0~G5 are inverted or not. (PVI suggests connecting to GND)

When "REV=1", these data will be inverted.

EX: "00"→"3F", "07"→"38", "15"→"2A"

Note 5-4: Polarity selector for dot-inversion control. Available at the rising edge of LD.

When POL=1: Even outputs range from V1~V7, and Odd outputs range from V8~V14;

When POL=0: Even outputs range from V8~V14, and Odd outputs range from V1~V7.

Note 5-5: When OE is connected to high "1", the driver outputs are disabled (Gate output = V_{EE}).

Under this condition, the operation of registers will not be affected.


Note 5-6: Select up or down shift

| U/D | STVU | STVD | Shift |
|-----|-------|-------|------------|
| 1 | Hi-Z | Input | Down to Up |
| 0 | Input | Hi-Z | Up to Down |


Note 5-7: Gate driver shift clock

Note 5-8: Gate on voltage, $V_{GG}=+17$ V.

Note 5-9: Gate off voltage, $V_{EE}=-8$ V.

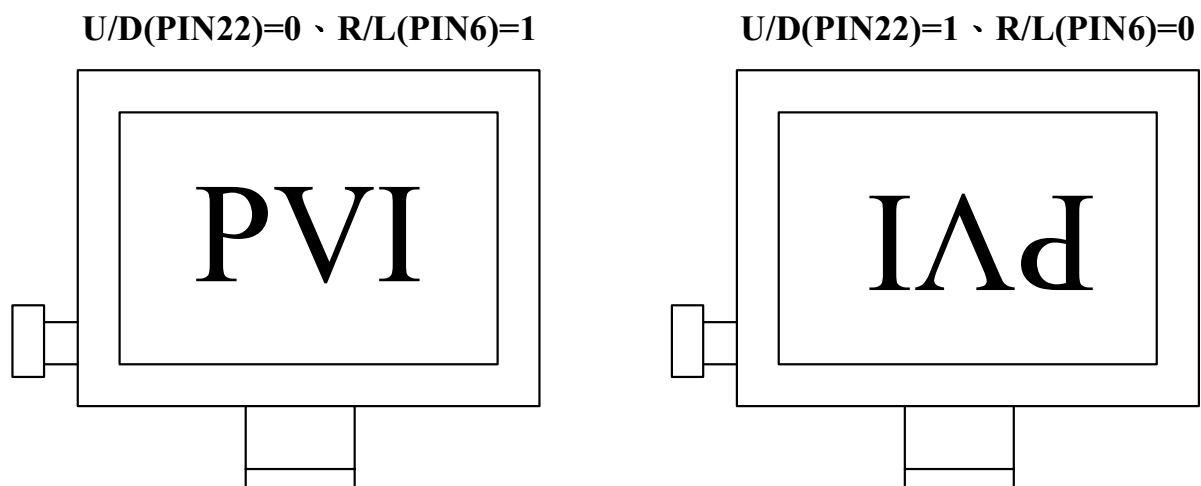

Note 5-10: Typical Application Circuit (When VDD2 = +9.5V)

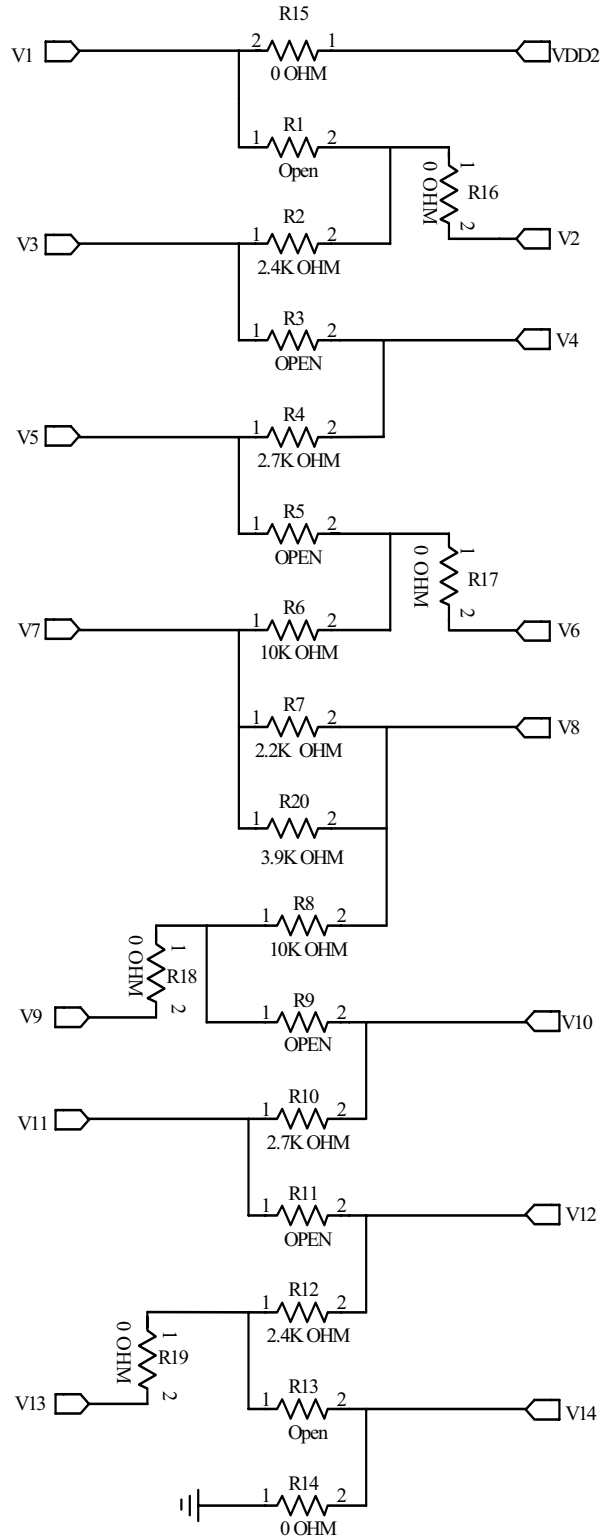

Note 5-11 :This pin is NC or must connect VDD1

5-2) LED Backlight driving

Connector type: JST BHSR-02VS-1

| Pin No | Symbol | Description | Remark |
|--------|--------|--------------------------|--------------------|
| 1 | + | Input terminal (Anode) | Wire color : Red |
| 2 | - | Input terminal (Cathode) | Wire Color : Black |

5-3) Sensor driving

Connector type: JST BHSR-02VS-1

Thermistor : URATA-NCPXH103F03RC

| Pin No | Symbol | Description | Remark |
|--------|--------|------------------------------|--------------------|
| 1 | 1 | Input terminal (Ground side) | Wire Color : Black |
| 2 | 2 | Connect to NTC | Wire Color : White |

6. Absolute Maximum Ratings:

$$V_{SS1}=V_{SS2}=GND=0V, T_a=25^{\circ}C$$

| Parameters | Symbol | MIN. | MAX. | Unit | Remark |
|----------------|-----------------|------|--------------|------|--------|
| Supply Voltage | V_{DD1} | -0.3 | 5.0 | V | |
| | V_{CC} | | | V | |
| | V_{DD2} | -0.5 | 12.0 | V | |
| | V_{GG} | -0.3 | 40.0 | V | |
| | $V_{GG}-V_{EE}$ | -0.3 | 40 | V | |
| | V_{EE} | -20 | 0.3 | V | |
| Digital Input | V_{IN} | -0.5 | $V_{CC}+0.5$ | V | |

7.Electrical Characteristics

7-1) Recommended Operating Conditions:

$V_{SS1}=V_{SS2}=GND=0V, Ta=25^{\circ}C$

| Item | Symbol | Min. | Typ. | Max. | Unit | Remark |
|----------------------------------|-----------|--------------|------|--------------|------|--------|
| Supply Voltage for Source Driver | V_{DD1} | +3.0 | +3.3 | +3.6 | V | |
| | V_{DD2} | 9 | 9.5 | 10 | V | |
| Supply Voltage for Gate Driver | V_{GG} | - | 17 | - | V | |
| | V_{EE} | - | -8 | - | V | |
| | V_{CC} | 3.0 | 3.3 | 3.6 | V | |
| Digital Input Voltage | V_{IH} | $0.8V_{DD1}$ | - | V_{DD1} | V | |
| | V_{IL} | 0 | - | $0.2V_{DD1}$ | V | |
| V_{com} Voltage | V_{com} | - | 3.6 | - | V | |

7-2) Recommended driving condition for LED back light

$Ta = 25^{\circ}C$


| Parameter | Symbol | Min | TYP | MAX | Unit | Remark |
|---------------------------------|-----------|-----|-----|--------|------|-------------------|
| Supply voltage of LED backlight | V_{LED} | - | - | (11.8) | V | Note 7-1 |
| Supply current of LED backlight | I_{LED} | - | 120 | - | mA | Note 7-2 |
| Backlight Power Consumption | P_{LED} | - | - | 8.5 | W | Note 7-1/Note 7-3 |

Note 7-1 : $I_{LED} = 120mA$ (Constant Current).

Note 7-2 : The LED driving condition is defined for each LED module. (3 LED Serial)

Input current = $120mA * 6 = 720mA$

Note 7-3 : $P_{LED} = V_{LED-1} * I_{LED-1} + V_{LED-2} * I_{LED-2} + \dots + V_{LED-5} * I_{LED-5} + V_{LED-6} * I_{LED-6}$

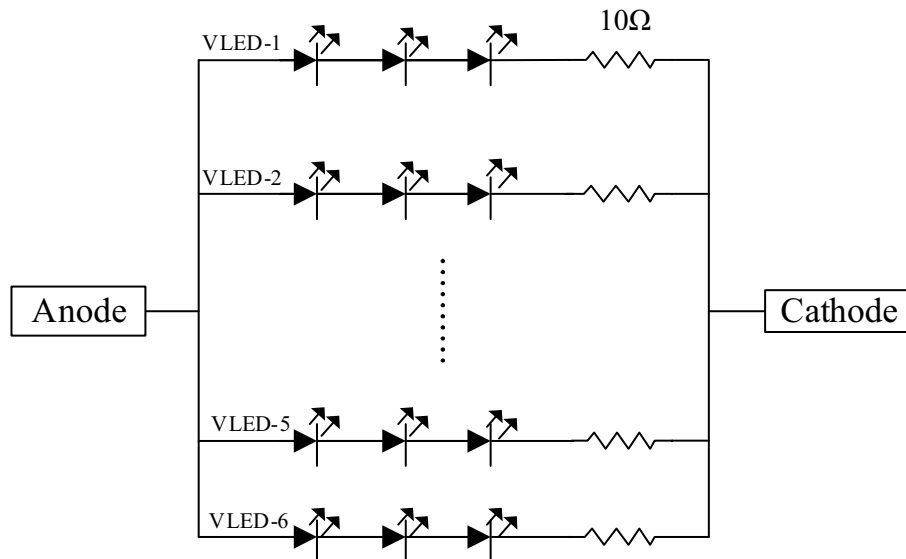


7-3) Power Consumption

| Parameter | Symbol | Condition | Typ. | Max. | Unit | Remark |
|--|------------------|--------------------------|--------|--------|------|----------|
| Supply Current for Gate Driver (Hi level) | I _{GG} | V _{GG} = +17V | 0.15 | 0.45 | mA | |
| Supply Current for Gate Driver (Low level) | I _{EE} | V _{EE} = -8V | 0.17 | 0.51 | mA | |
| Supply Current for Source Driver (Digital) | I _{DD1} | V _{DD1} =+3.3V | 2.58 | 5.16 | mA | |
| Supply Current for Source Driver (Analog) | I _{DD2} | V _{DD2} = +9.5V | 20.66 | 41.32 | mA | |
| Supply Current for Gate Driver (Digital) | I _{CC} | V _{CC} = +3.3V | 0.1 | 0.3 | mA | |
| LCD Panel Power Consumption | | - | 209.02 | 422.29 | mW | Note 7-4 |
| Total Power Consumption | - | - | - | 8.92 | W | |

Note 7-4: The power consumption for back light is not included.

8. Pixel Arrangement

The LCD module pixel arrangement is the stripe.

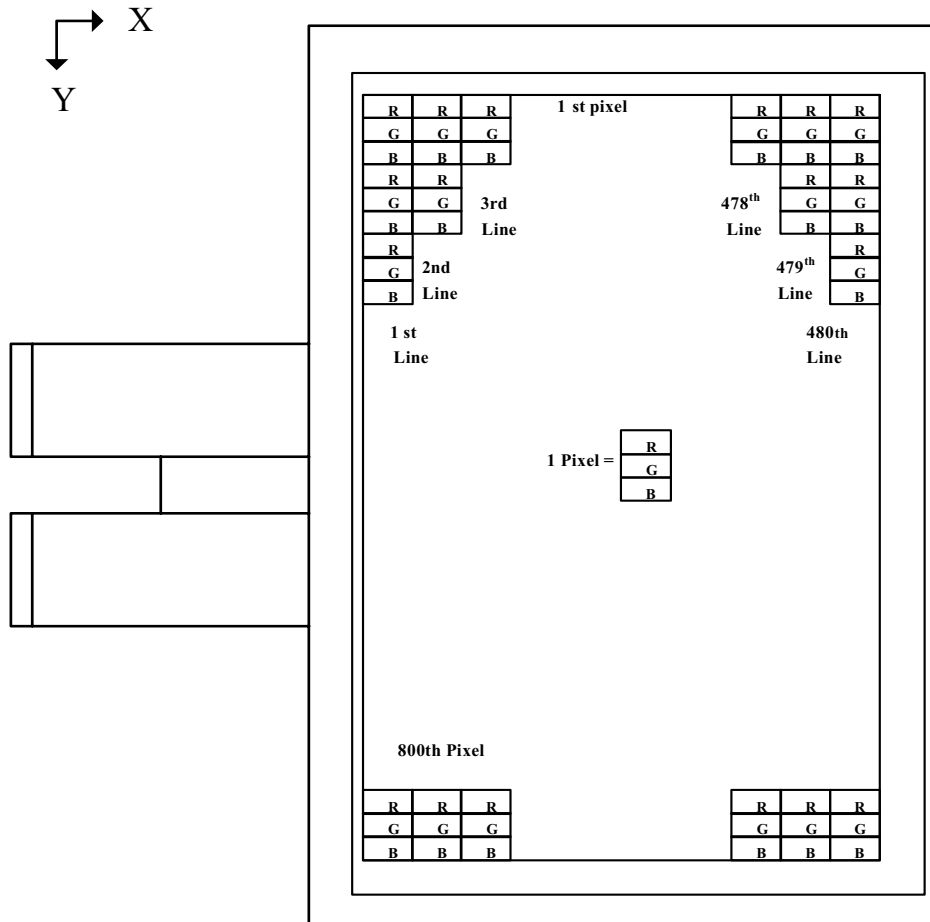


9. Display Color and Gray Scale Reference

| Color | | Input Color Data | | | | | | | | | | | | | | | | | |
|--------------|------------|------------------|----|----|----|----|----|-------|----|----|----|----|----|------|----|----|----|----|----|
| | | Red | | | | | | Green | | | | | | Blue | | | | | |
| | | R5 | R4 | R3 | R2 | R1 | R0 | G5 | G4 | G3 | G2 | G1 | G0 | B5 | B4 | B3 | B2 | B1 | B0 |
| Basic Colors | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red (63) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green (63) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue (63) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Red | Red (00) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red (01) | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red (02) | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Darker | | | | | | | | | | | | | | | | | | |
| | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ |
| | Brighter | | | | | | | | | | | | | | | | | | |
| | Red (61) | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red (62) | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Red (63) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Green | Green (00) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green (01) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green (02) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Darker | | | | | | | | | | | | | | | | | | |
| | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ |
| | Brighter | | | | | | | | | | | | | | | | | | |
| | Green (61) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green (62) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Green (63) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Blue | Blue (00) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue (01) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | Blue (02) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| | Darker | | | | | | | | | | | | | | | | | | |
| | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ |
| | Brighter | | | | | | | | | | | | | | | | | | |
| | Blue (61) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 |
| | Blue (62) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| Blue (63) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | |

10. Block Diagram

11-1) TFT-module Block Diagram

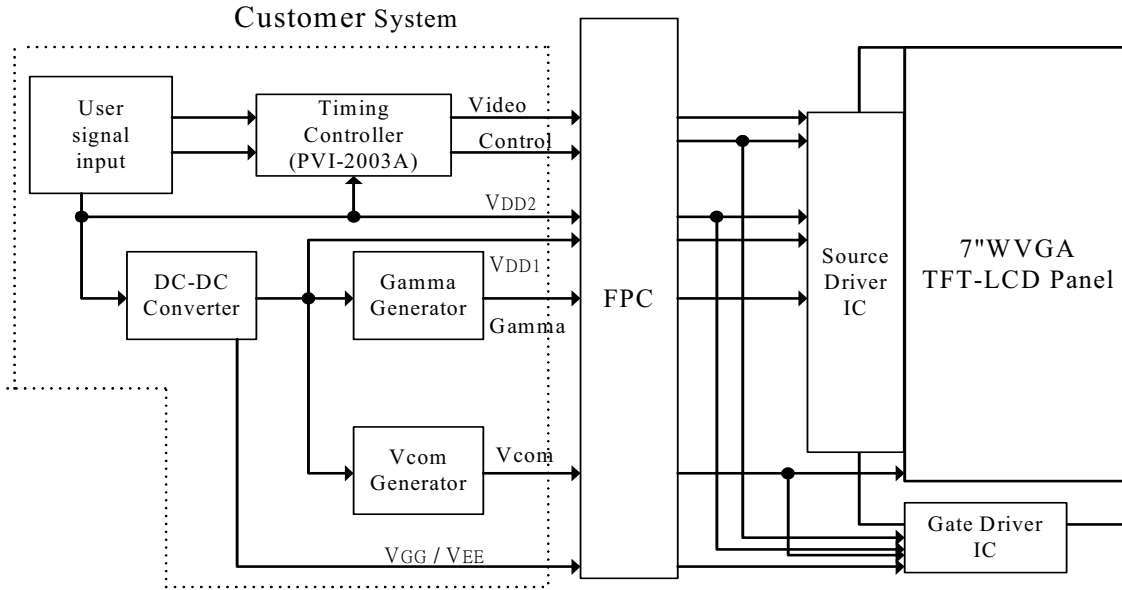

If you use PM070WXF, you can apply PVI-2003A(Timing controller) which will generate timing signals to support PM070WXF

11. Interface Timing
11.1) Timing Parameters

 AC Electrical Characteristics ($V_{CC}=V_{DD1}=3.3V$, $V_{DD2}=9.5V$, $GND=V_{SS1}=V_{SS2}=0V$, $T_a=25^{\circ}C$)

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|--------------------------------|------------------|------|------|------|-----------------|
| CLK Frequency | Fclk | - | 32 | 40 | MHz |
| CLK Pulse Width | Tcw | 25 | - | - | ns |
| Data Set-up Time | Tsu | 4 | - | - | ns |
| Data Hold Time | Thd | 2 | - | - | ns |
| Propagation Delay of DIO2/1 | Tphl | 6 | 10 | 15 | ns |
| Time That The Last Data to LD | Tld | 1 | - | - | T _{CW} |
| Pulse width of LD | Twld | 2 | - | - | T _{CW} |
| Time That LD to DIO1/2 | Tlds | 5 | - | - | T _{CW} |
| POL Set-up Time | Tpsu | 6 | - | - | ns |
| POL Hold Time | Tphd | 6 | - | - | ns |
| OE Pulse Width | T _{OE} | 1 | - | - | μs |
| CKV Pulse Width | T _{CKV} | 500 | - | - | ns |
| STV Set-up Time | T _{SUV} | 400 | - | - | ns |
| STV Hold Time | T _{HDV} | 400 | - | - | ns |
| Horizontal Display Period | T _{HDP} | - | 800 | - | T _{CW} |
| Horizontal Period Timing Range | T _{HP} | - | 1056 | - | T _{CW} |
| Horizontal Lines Per Field | T _V | 484 | 508 | 620 | T _{HP} |
| Vertical Display Timing Range | T _{DV} | - | 480 | - | T _{HP} |

11.2) Timing Diagram

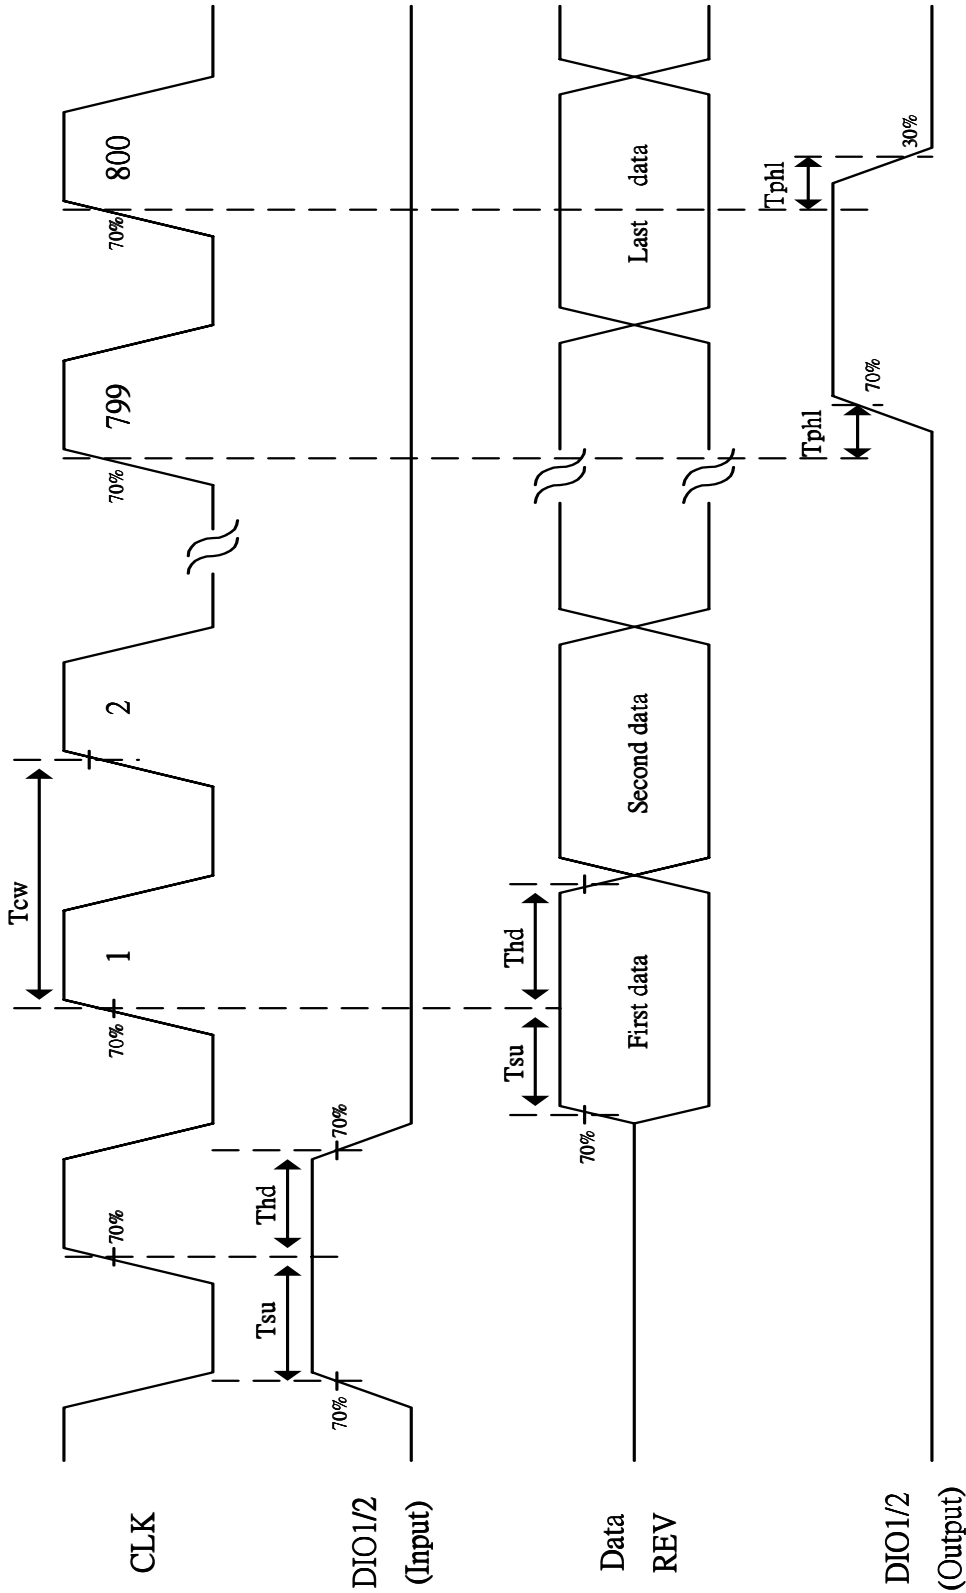


Fig. 11-1 Horizontal timing (1)

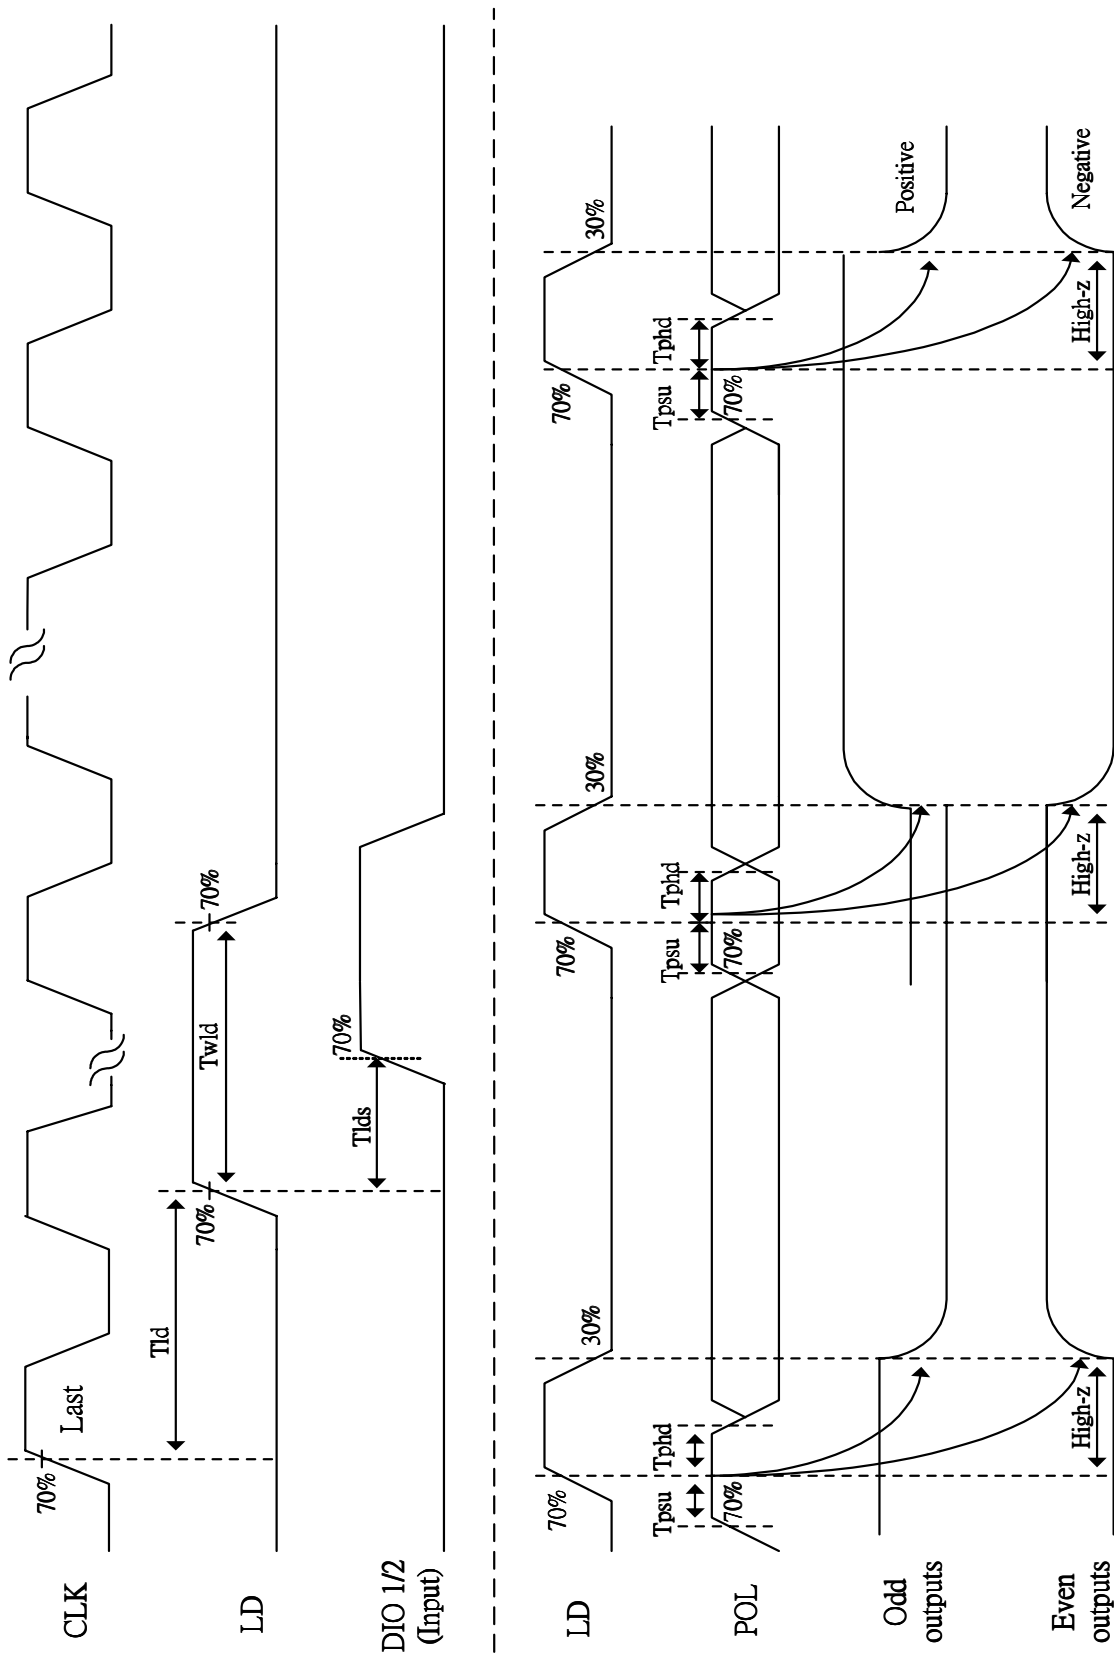


Fig. 11-2 Horizontal timing(2)

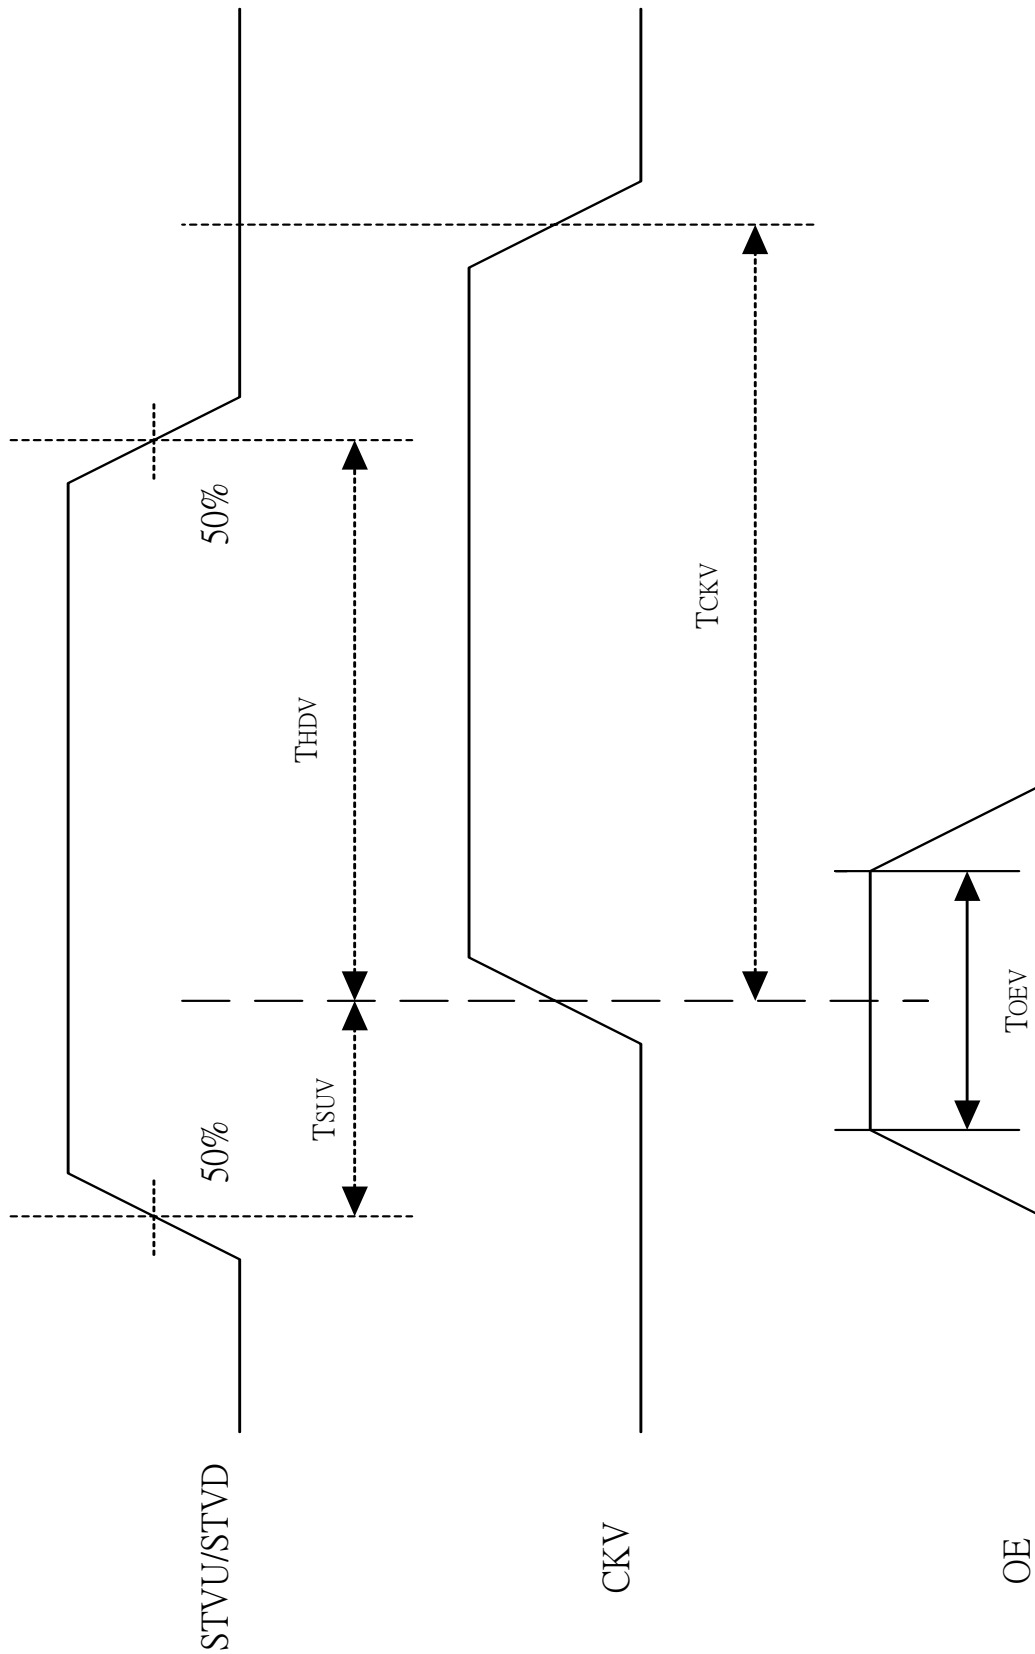


Fig. 11-3 Vertical shift clock timing


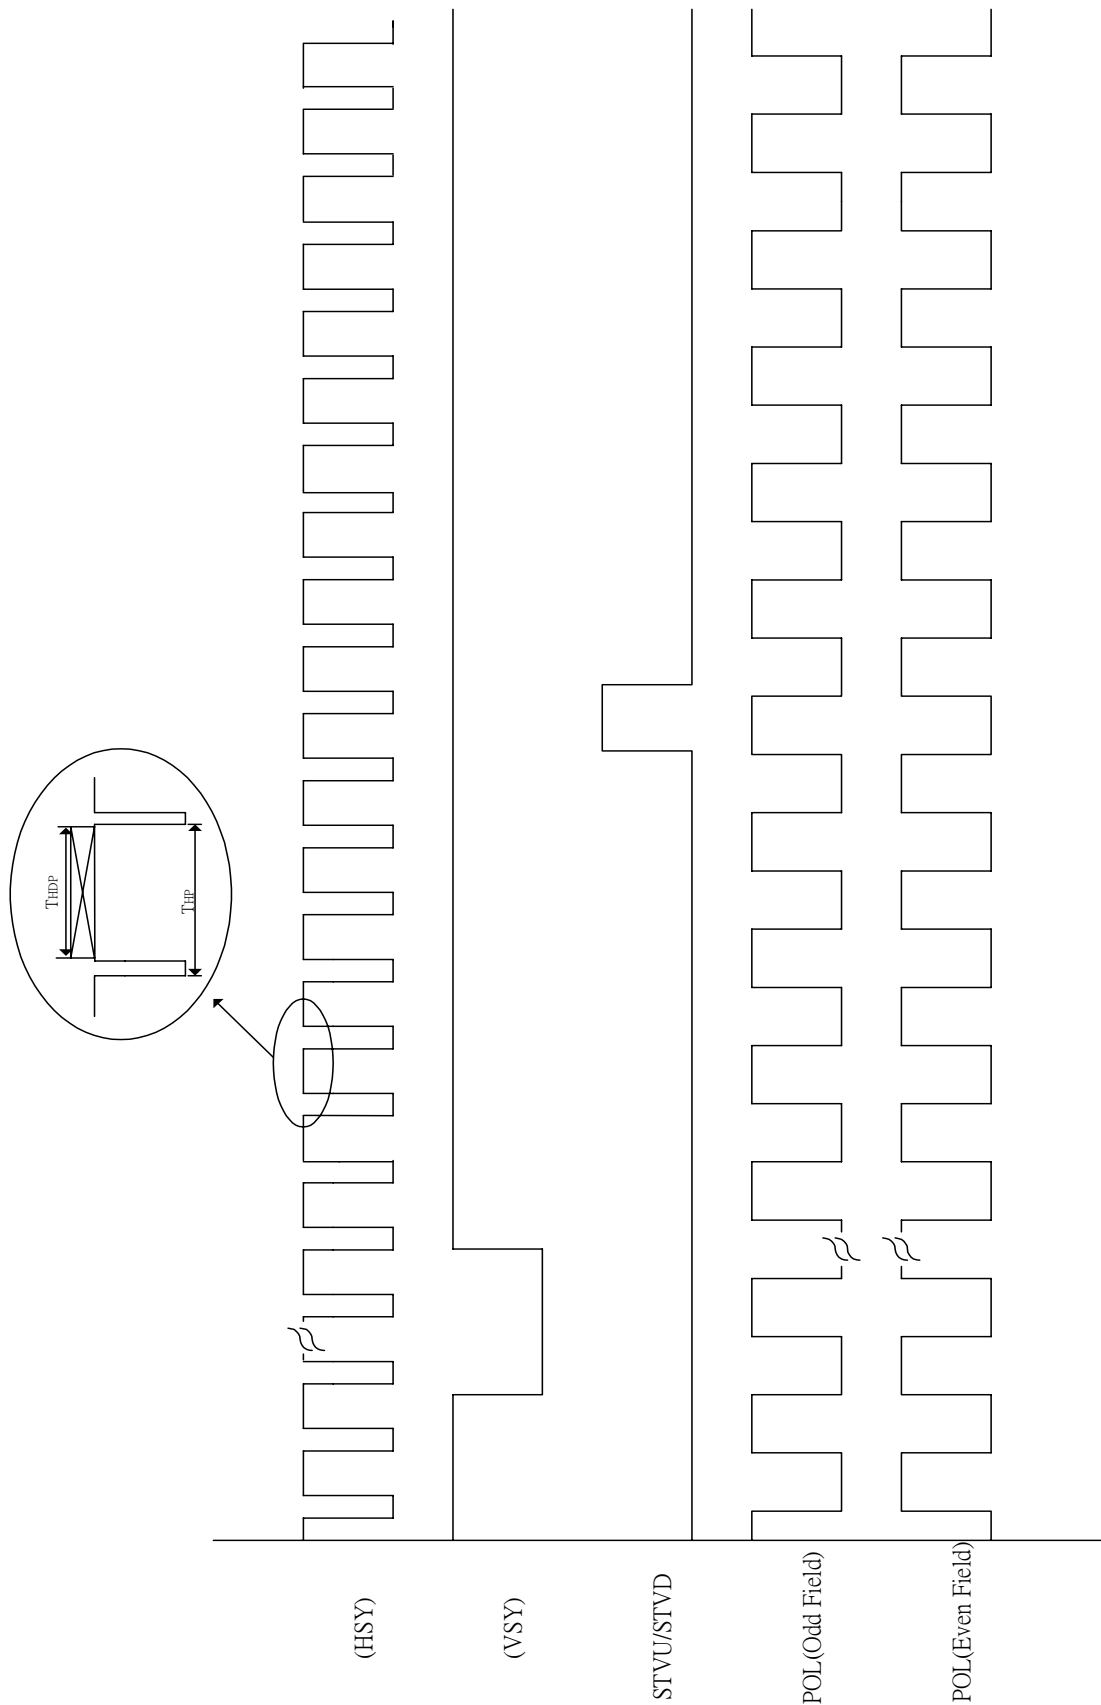


Fig. 11-4 Vertical timing

12. Power On Sequence

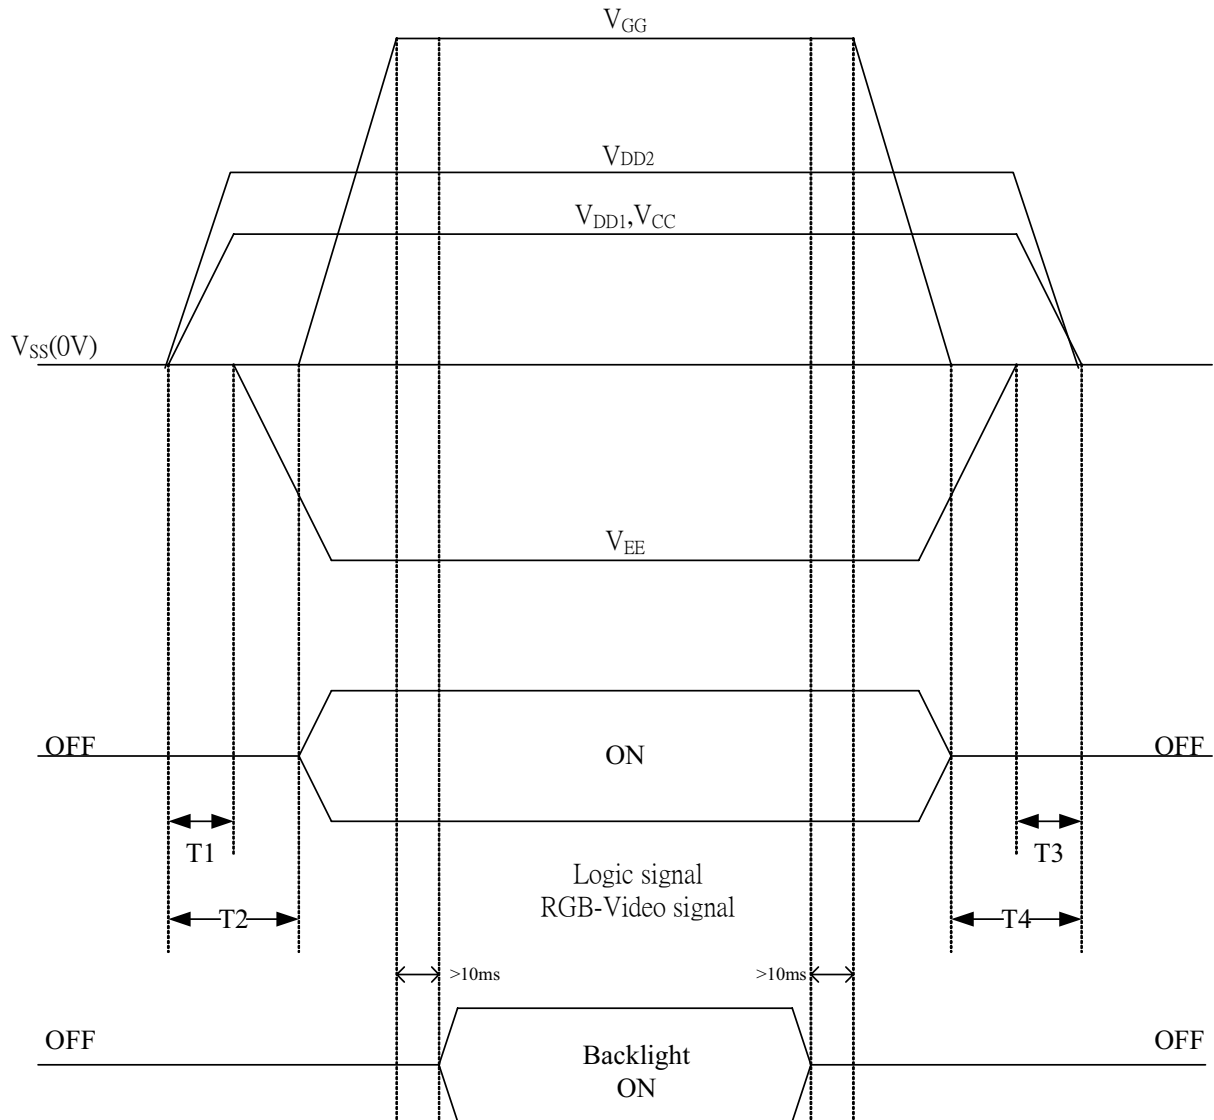

1. $1.10\text{ms} \leq T1 < T2$

2. $0\text{ms} < T3 \leq T4 \leq 10\text{ms}$


13. Optical Characteristics

13-1) Specification:

 $T_a=25^{\circ}\text{C}$


| Parameter | Symbol | Condition | MIN. | TYP. | MAX. | Unit | Remarks |
|----------------------|------------|--------------------------------------|----------|----------|------|------------------------|-----------|
| Viewing Angle | Vertical | $\theta_{11,12}$ | ± 70 | ± 75 | - | deg | Note 13-1 |
| | Horizontal | θ_{21} (3 o'clock) | 65 | 70 | - | deg | |
| | | θ_{22} (9 o'clock) | 45 | 50 | - | deg | |
| Contrast Ratio | CR | $\theta=0^{\circ}$ | 500 | 600 | - | - | Note 13-2 |
| Response time | Rise | Tr | - | 15 | 30 | ms | Note 13-3 |
| | Fall | Tf | - | 25 | 50 | ms | |
| Brightness | L | $\theta=0^{\circ}/\varphi=0^{\circ}$ | 800 | 1000 | - | cd/m^2 | Note 13-4 |
| Luminance Uniformity | U | | 75 | 80 | - | % | Note 13-5 |
| Cross Talk | - | $\theta=0^{\circ}$ | - | - | 3.5 | % | Note 13-6 |
| White Chromaticity | x | $\theta=0^{\circ}/\varphi=0^{\circ}$ | 0.24 | 0.29 | 0.34 | - | |
| | y | | 0.27 | 0.32 | 0.37 | - | |
| LED Life Time | - | - | - | 50000 | - | hr | Note 13-7 |

All the optical measurement shall be executed 30 minutes after backlight being turn-on. The optical characteristics shall be measured in dark room (ambient illumination on panel surface less than 1 Lux). The measuring configuration shows as following figure.

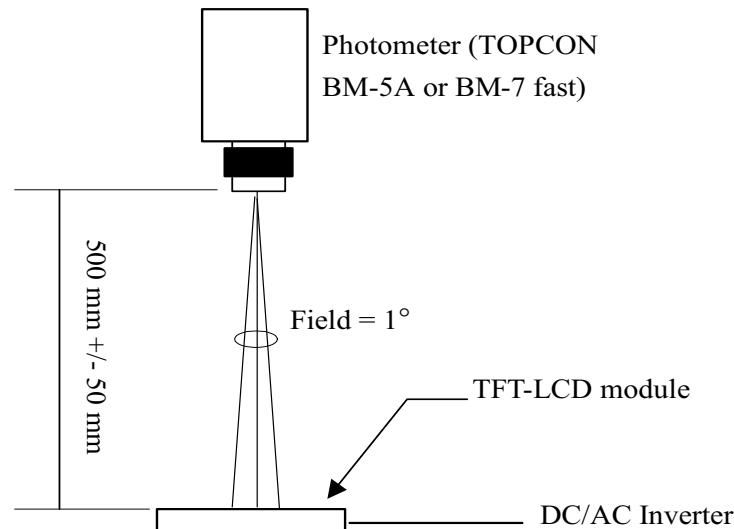


Optical characteristics measuring configuration

Note 13-1: The definitions of viewing angles are as follow.

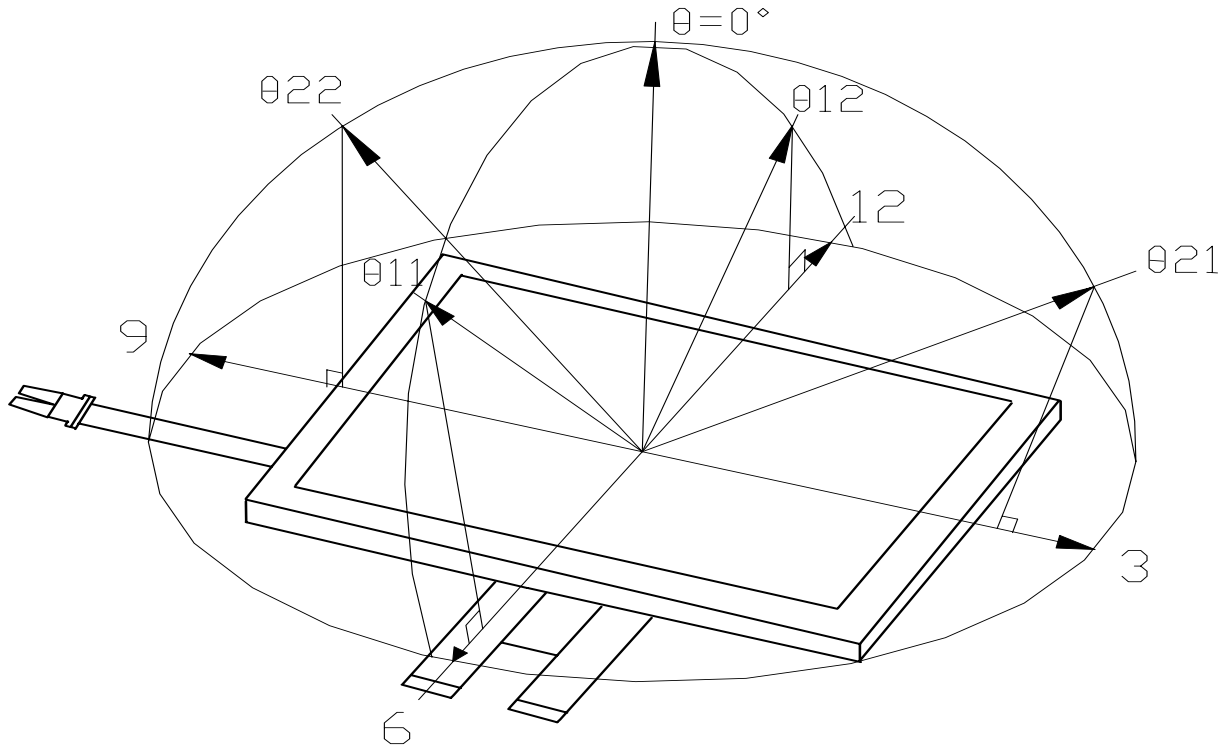

Note 13-2: The definition of contrast ratio $CR = \frac{\text{Luminance at gray level 63}}{\text{Luminance at gray level 0}}$

Note 13-3: Definition of Response Time T_r and T_f :

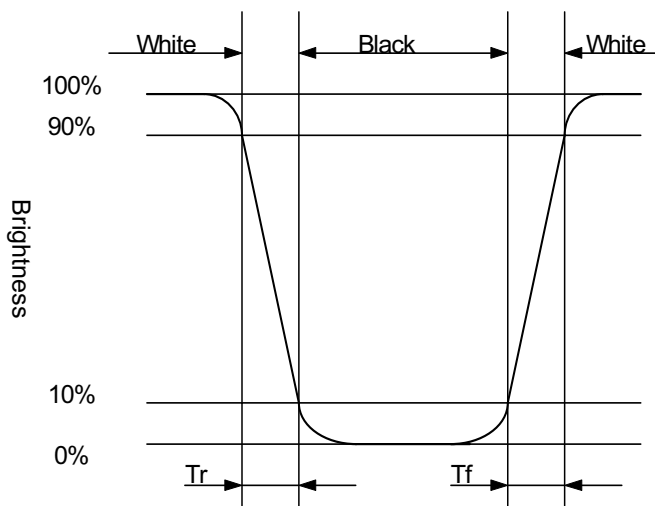

Note 13-4 : Topcon BM-5A or BM-7 fast luminance meter 1° field of view is used in the testing.

Note 13-5: The uniformity of LCD is defined as

$$U = \frac{\text{The Minimum Brightness of the 9 testing Points}}{\text{The Maximum Brightness of the 9 testing Points}}$$


Luminance meter : BM-5A or BM-7 fast(TOPCON)

Measurement distance : 500 mm +/- 50 mm

Ambient illumination : < 1 Lux

Measuring direction : Perpendicular to the surface of module

The test pattern is white (Gray Level 63).

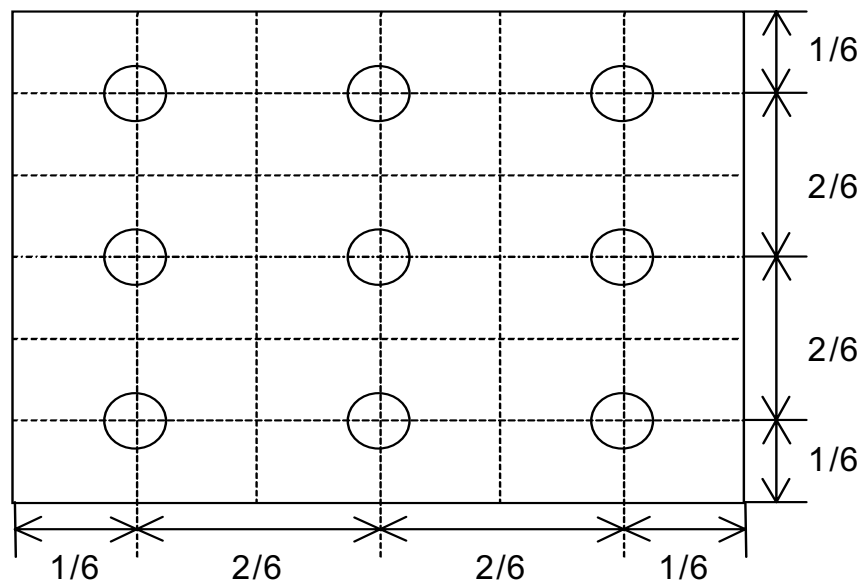

Note 13-6: Cross Talk (CTK) = $\frac{|YA-YB|}{YA} \times 100\%$

YA: Brightness of Pattern A


YB: Brightness of Pattern B

Luminance meter : BM 5A or BM-7 fast (TOPCON)

Measurement distance : 500 mm +/- 50 mm

Ambient illumination : < 1 Lux

Measuring direction : Perpendicular to the surface of module

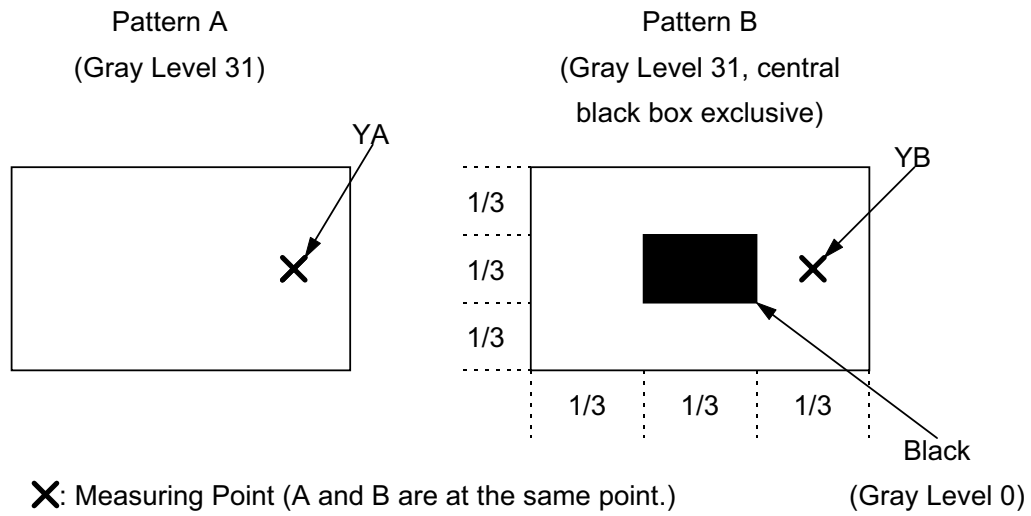

Note 13-7 : The “LED Life time “ is defined as the module brightness decrease to 50% original Brightness that the ambient temperature is 25°C and $I_{LED} = 720\text{mA}$.

14. Handling Cautions**14-1) Mounting of module**

- a) Please power off the module when you connect the input/output connector.
- b) Polarizer which is made of soft material and susceptible to flaw must be handled carefully.
- c) Protective film (Laminator) is applied on surface to protect it against scratches and dirt.
- d) Please following the tear off direction as figure 14-1 to remove the protective film as slowly as possible, so that electrostatic charge can be minimized.

14-2) Precautions in mounting

- a) When metal part of the TFT-LCD module (shielding lid and rear case) is soiled, wipe it with soft dry cloth.
- b) Wipe off water drops or finger grease immediately. Long contact with water may cause discoloration or spots.
- c) TFT-LCD module uses glass which breaks or cracks easily if dropped or bumped on hard surface. Please handle with care.
- d) Since CMOS LSI is used in the module. So take care of static electricity and earth yourself when handling.

14-3) Adjusting module

- a) Adjusting volumes on the rear face of the module have been set optimally before shipment.
- b) Therefore, do not change any adjusted values. If adjusted values are changed, the specifications described may not be satisfied.

14-4) Polarizer mark

The polarizer mark is to describe the direction of wide view angle film how to mach up with the rubbing direction.

14-5) Others

- a) Do not expose the module to direct sunlight or intensive ultraviolet rays for many hours.
- b) Store the module at a room temperature place.
- c) The voltage of beginning electric discharge may over the normal voltage because of leakage current from approach conductor by to draw lump read lead line around.
- d) If LCD panel breaks, it is possibly that the liquid crystal escapes from the panel. Avoid putting it into eyes or mouth. When liquid crystal sticks on hands, clothes or feet. Wash it out immediately with soap.
- e) Observe all other precautionary requirements in handling general electronic components.
- f) Please adjust the voltage of common electrode as material of attachment by 1 module.

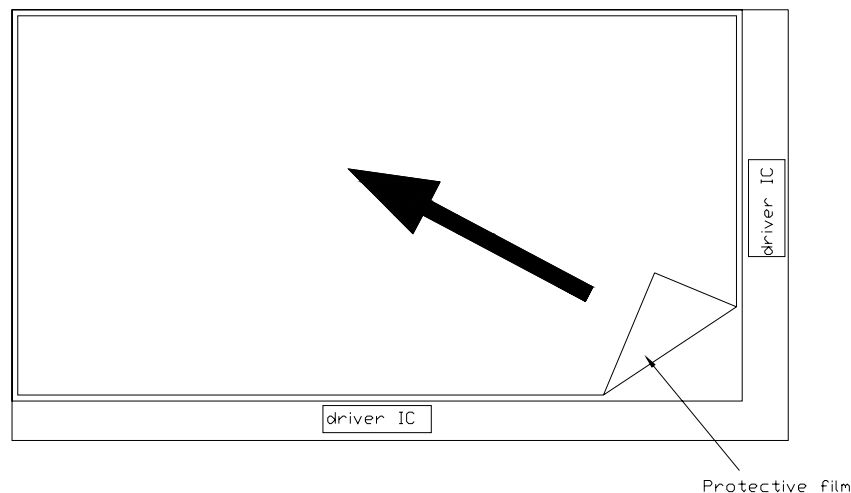


Figure 14-1 the way to peel off protective film

15. Reliability Test

| No | Test Item | Test Condition | Remark |
|----|---|---|----------|
| 1 | High Temperature Storage Test | Ta = +85°C, 240 hrs | |
| 2 | Low Temperature Storage Test | Ta = -40°C, 240 hrs | |
| 3 | High Temperature Operation Test | Ta = +70°C, 240 hrs | Note15-1 |
| 4 | Low Temperature Operation Test | Ta = -30°C, 240 hrs | |
| 5 | High Temperature & High Humidity Operation Test | Ta = +60°C, 90%RH, 240 hrs (No Condensation) | |
| 6 | Thermal Cycling Test (non-operating) | -30°C → +80°C, 200 Cycles 30min 30min | |
| 7 | Vibration Test (non-operating) | Frequency : 10 ~ 55 Hz, Amplitude : 1 mm Sweep time: 11 min Test Period: 6 Cycles for each direction of X, Y, Z | |
| 8 | Shock Test (non-operating) | 100G, 6ms Direction: ±X, ±Y, ±Z Cycle: 3 times | |
| 9 | Electrostatic Discharge Test (non-operating) | 200pF, 0Ω ±200V 1 time / each terminal | |

Ta: ambient temperature

Note: The protective film must be removed before temperature test.

Note15-1 : The brightness is over 600nits with $I_{LED}=100mA/LED$ (constant current, don't exceed) for each LED serial while the test condition of HTOT is 85°C.

[Criteria]

In the standard conditions, there is not display function NG issue occurred.
(including : line defect ,no image), All the cosmetic specification is judged before the reliability stress.

16. Packing Diagram

| | | | |
|------|---------------------------------|--------|------------|
| REV. | DESCRIPTION | Design | DATE |
| | INITIAL RELEASE | | |
| ⚠ | 變更防靜電材料(50-0500181->50-0500182) | Joseph | 2009.08.13 |

NOTE:
 1.Q'TY: 40 pcs panel/carton.
 2.Dimension: 530*295*230mm
 3.Weight: 10.6 Kg

| 4 | 50-0100111 | CARTON | 1 |
|------|------------|-------------|------------|
| 3 | 50-0500182 | 防靜電袋 | 40 抗靜電 |
| 2 | | PM070WXF | 40 |
| 1 | 50-0300861 | 瓦楞隔板緩衝材 | 1 上蓋+底座 |
| ITEM | PART NO. | DESCRIPTION | QTY REMARK |

| | | | | | |
|-----------|-------------|-------------------|---------|--------|-----------|
| MTL.SPEC. | | UNSPECIFIED TOL'S | | REMARK | |
| | | ANGLE | | | |
| | | ROUGHNESS | | | |
| APPROVE | Patrick lin | 09.08.13 | SCALE | UNIT | SHEET |
| CHECK | Patrick lin | 09.08.13 | | | 1 OF 1 |
| DRAWN | Joseph | 09.08.13 | MTL.NO. | | DWG FILE: |
| | | | | | RBV. 01 |
| | | | | | A4 SIZE |

元太科技工業股份有限公司
Prime View International Co., Ltd.

DWG.TITLE
7" WVGA(H/B LED B/L) Packing