

AZ2704

30 AMP POWER RELAY

RoHS compliant !

FEATURES

- 30 Amp switching
- 30 Amp AC7a approved
- 900 Amp short circuit current (carrying)
- PC mount
- Dielectric strength 4000 Vrms
- Standard (2.4 mm) or wide contact gap (3.0 mm) available
- UL, CUR file E44211
- TÜV certificate R50164753



CONTACTS

Arrangement	SPST (1 Form X) DPST (2 Form X)
Ratings	Resistive load: Max. switched power: 840 W or 8310 VA Max. switched current: 30 A Max. switched voltage: 150 VDC* or 400 VAC * Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
Rated Load UL	30 A at 277 VAC, resistive, 30k cycles [1][2] 25 A at 277 VAC, resistive, 100k cycles [2] 25 A at 240 VAC, resistive, 100k cycles [1] 3 HP at 240 VAC, 6k cycles [1] 1.5 HP at 120 VAC, 6k cycles [1] TV-10 at 120 VAC, 6k cycles [1] 105 LRA / 20.5 FLA at 240 VAC, 100k cycles [1] SPST (1 Form X) 10 A at 120 VAC, tungsten, 6k cycles [1][2] 3 HP at 240 VAC, 100k cycles [2] 1.5 HP at 120 VAC, 100k cycles [2] DPST (2 Form X) 10 A at 277 VAC, tungsten, 6k cycles [2] 10 A at 120 VAC, tungsten, 6k cycles [1] 2 HP at 277 VAC, 75k cycles [2] 1 HP at 125 VAC, 30k cycles [2]
TÜV	27 A at 240 VAC, cos phi 0.8, 50k cycles [1][2] 25 A at 240 VAC, cos phi 0.4, 50k cycles [1][2]
Material	Silver cadmium oxide [1], silver tin oxide [2]
Resistance	< 100 milliohm initially (24 V, 1 A voltage drop method)

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁶ 1 x 10 ⁵ at rated load
Operate Time (typical)	30 ms at nominal coil voltage
Release Time (typical)	30 ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	4000 Vrms coil to contact 2000 Vrms between open contacts
Insulation Resistance	1000 megohms min. at 20°C, 500 VDC, 50% RH
Dropout	> 5% of nominal coil voltage (DC) > 15% of nominal coil voltage (AC)
Ambient Temperature Operating	At nominal coil voltage -40°C (-40°F) to 70°C (158°F) at nominal, -40°C (-40°F) to 85°C (185°F) at 50% or less of nominal (holding voltage).
Storage	-40°C (-40°F) to 105°C (221°F)
Vibration	0.062" DA at 10–55 Hz
Shock Operating Non-Operating	10 g, 11 ms, 1/2 sine (no false operation) 100 g, 11 ms, 1/2 sine (no damage)
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, PC mount
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Weight	120 grams
Packing unit in pcs	16 per plastic tray / 80 per carton box

COIL

Power	
At Pickup Voltage (typical)	1.08 W (DC) 1.7 VA (AC)
Max. Continuous Dissipation	3.8 W at 20°C (68°F) ambient
Temperature Rise	50°C (90°F) at nominal coil voltage
Temperature	Max. 130°C (266°F) - Class B Max. 155°C (311°F) - Class F

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0
Fax +49 89 800 97 200

office@ZETTLERelectronics.com
www.ZETTLERelectronics.com

AZ2704


RELAY ORDERING DATA

COIL SPECIFICATIONS – DC COIL				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance Ohm $\pm 10\%$	1 Form X	2 Form X
3	2.3	4.2	5	AZ2704-1A-3D	AZ2704-2A-3D
6	4.5	8.4	19	AZ2704-1A-6D	AZ2704-2A-6D
12	9.0	16.8	75	AZ2704-1A-12D	AZ2704-2A-12D
24	18.0	33.7	300	AZ2704-1A-24D	AZ2704-2A-24D
48	36.0	67.5	1,200	AZ2704-1A-48D	AZ2704-2A-48D,
100	75.0	140.5	5,200	AZ2704-1A-100D	AZ2704-2A-100D
110	82.5	154.7	6,300	AZ2704-1A-110D	AZ2704-2A-110D
200	150.0	282.4	21,000	AZ2704-1A-200D	AZ2704-2A-200D

COIL SPECIFICATIONS – AC COIL				ORDER NUMBER*	
Nominal Coil VAC	Must Operate VAC	Max. Continuous VAC	Coil Current mA $\pm 10\%$	1 Form X	2 Form X
6	4.8	6.6	319	AZ2704-1A-6A	AZ2704-2A-6A
12	9.6	13.2	160	AZ2704-1A-12A	AZ2704-2A-12A
24	19.2	26.4	80	AZ2704-1A-24A	AZ2704-2A-24A
48	38.4	52.8	40	AZ2704-1A-48A	AZ2704-2A-48A
120	96.0	132.0	23	AZ2704-1A-120A	AZ2704-2A-120A
220	176.0	242.0	10	AZ2704-1A-220A	AZ2704-2A-220A
240	192.0	264.0	9	AZ2704-1A-240A	AZ2704-2A-240A

* For silver tin oxide add suffix "T". For wide contact gap add "W". For Class F add suffix "F".

MECHANICAL DATA

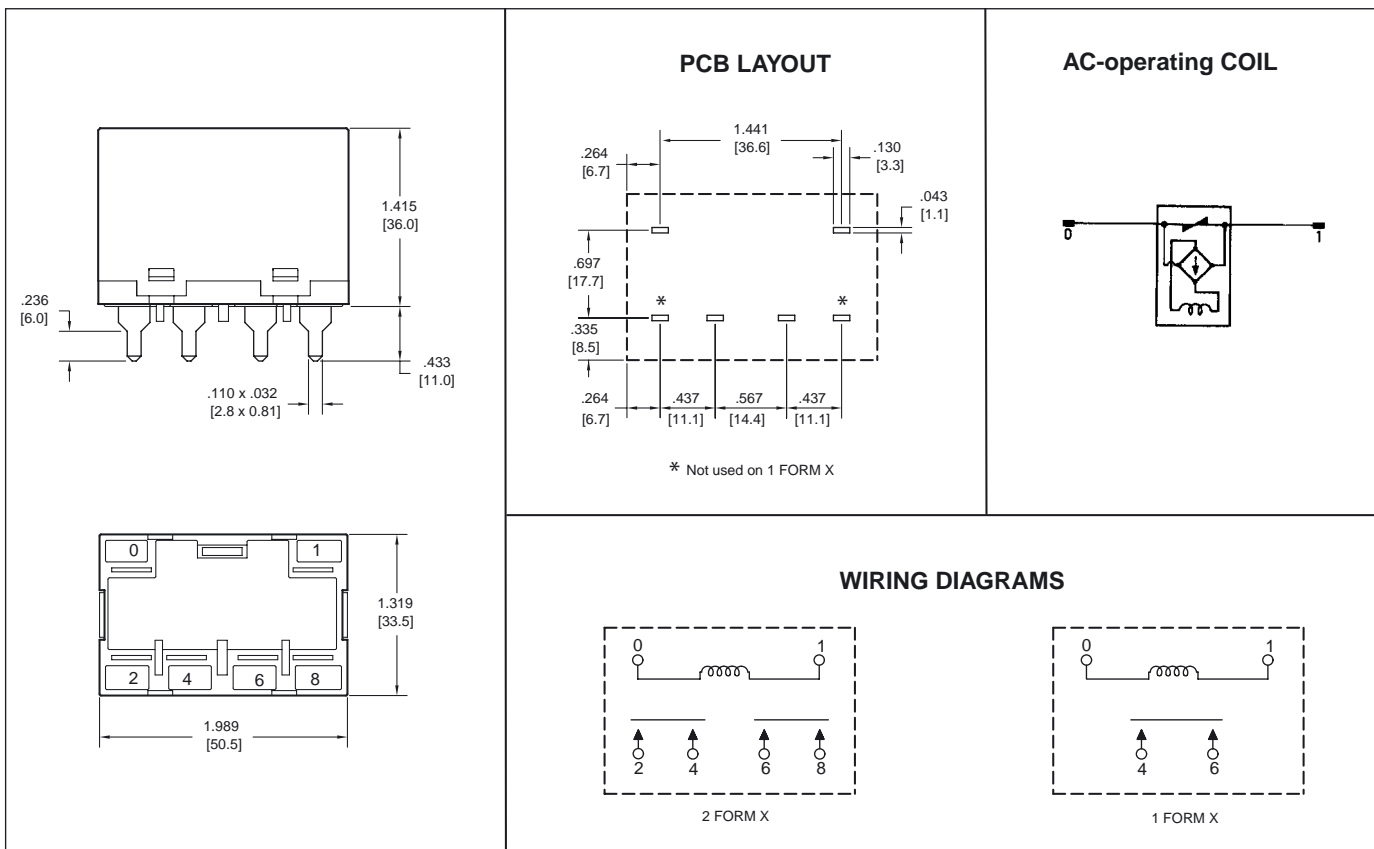

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "

ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0

Fax +49 89 800 97 200

office@ZETTLERelectronics.com

www.ZETTLERelectronics.com

2010-12-17